

PICTOR GO 620

The Pictor GO 620 is a compact yet powerful all-rounder, an LED work light with an M8 bolt for easy installation. With 2000 operational lumens at 5000K, it delivers bright, natural illumination, reducing eye strain and improving precision in demanding work environments. Built to handle dust, moisture, and vibrations, its sturdy design ensures reliability in low-light conditions. The Pictor GO 620 enhances safety, efficiency, and visibility where it matters most.



Not all products are available in all markets. During continuous improvement specifications and design are changing. All values are nominal values. Illustrations do not necessarily show the design of every version and some features are version specific. The lumens output varies depending on lens colour.

TECHNICAL DATA

Theoretical Lumens Output	3000 lm	Vibration	8Grms 24-2000Hz
Operational Lumens Output	2000 lm	Lens	Plastic
Colour Temperature	5000 K	Body / Housing	Aluminum
Nominal Voltage DC	12 V 24 V	Weight	0.55 kg
Input Voltage DC	9 - 16 V 18 - 32 V	IP Rating	IP68, IP6K9K
Power Consumption	29 W	Salt Spray Test	ISO 9227 240H
Nominal Current at	12V=2.16A, 24V=1.03A	EMC	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2, EN 12985
Connector	Built-in Deutsch DT-2 (2-pin)	Operating Temperatures	-40°C... +85°C (Overheat protected)
Mount	M8	Electronics	Isolated
Shock	60G	Part Numbers	Flood: 988-602B, Diffused: 988-605B


CONNECTORS

KEY FEATURES


- Compact and low-profile design
- Suitable for mounting in tight spaces
- Superior electromagnetic compatibility (CISPR 25 Class 5)

LIGHT PATTERNS

Pictor GO 620, 2000lm Flood

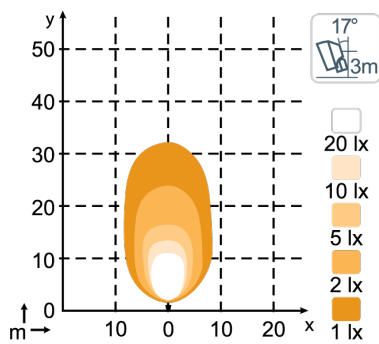

Pictor GO 620, 1800lm Diffused

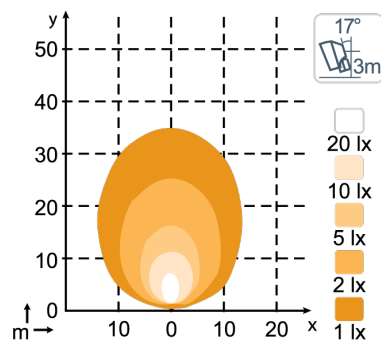

DRAWINGS

