

strands[®]

-lighting division

MANUAL

FOR 9T ILLUSION TAIL LIGHTS

800655

BLACK: (-) TO CHASSIS GROUND

RED: + BRAKE

YELLOW: + INDICATOR

GREEN: + TAIL

800656

BLACK: (-) TO CHASSIS GROUND

RED: + BRAKE

YELLOW: + TAIL

800657

BLACK: (-) TO CHASSIS GROUND

RED: + INDICATOR


800658

BLACK: (-) TO CHASSIS GROUND

RED: + FOG

YELLOW: + REVERSE

*2,5m Cable

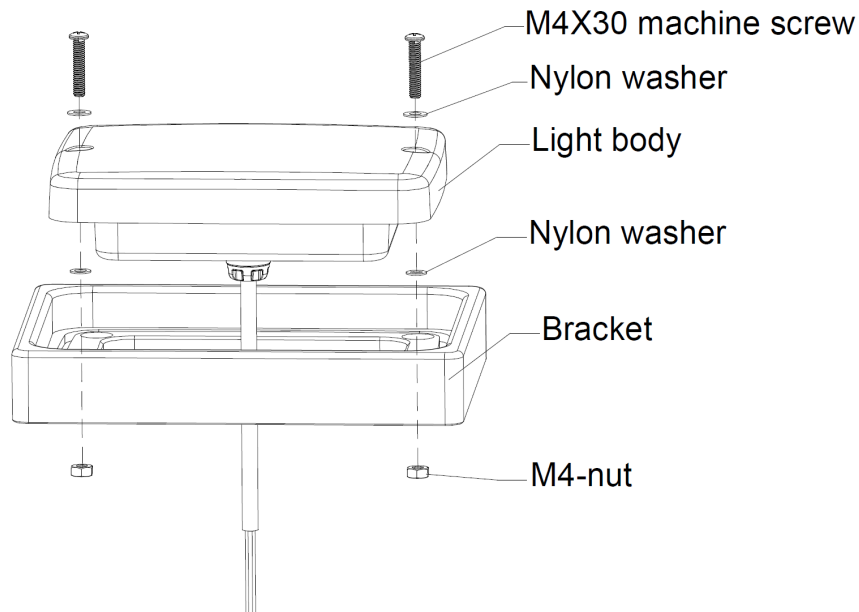

(Installation diagram)

* We recommend using our rubber frames (Part numbers: 800112, 800112-P, 800113) or square frame brackets (Part numbers: 800635-800640) for mounting square tail lights on vehicle.

Note: Bracket is not included in the package.


Contact us if you need support: support@strands.se or +46(0)320-450450



www.strands.se
www.strandseurope.com

strands[®]

-lighting division

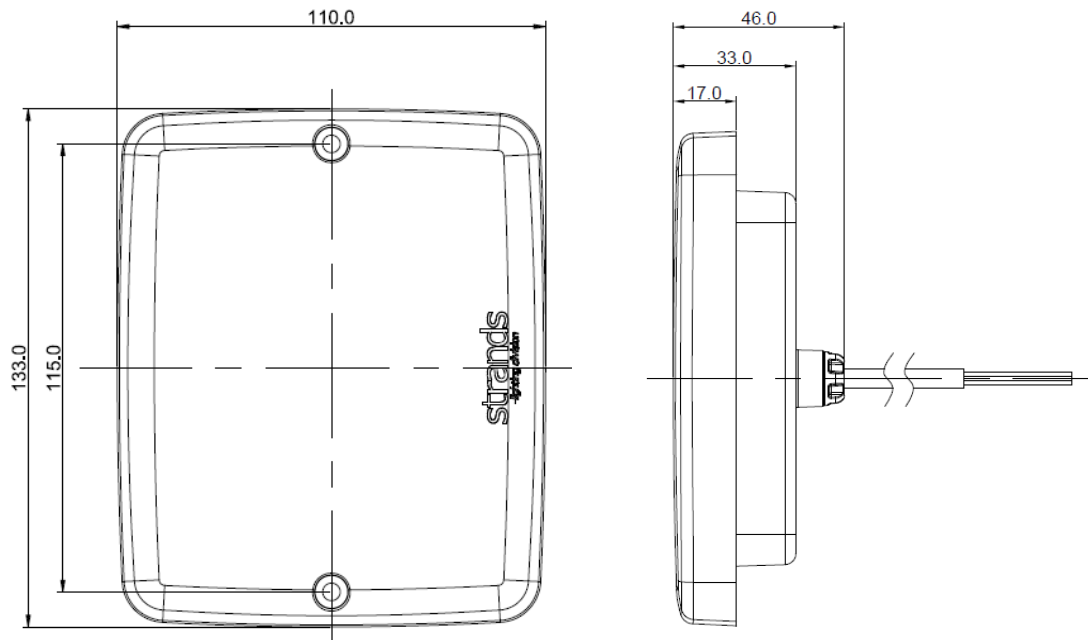

READ THIS BEFORE INSTALLATION

READ ALL INSTRUCTIONS AND STUDY DIAGRAMS BEFORE INSTALLING YOUR NEW LIGHTS!

LEGAL MOUNTING

Check with state or local authorities for laws governing usage and proper mounting of your new lights.

TAKE CARE OF YOUR PRODUCT

Keep the product clean. Dirt on the lens and heat-sink may shorten the products lifetime.

We recommend using lukewarm water and alkaline degreasing.

Follow the degreasing instructions carefully and rinse off gently with cold or lukewarm water on low pressure.

WARNING!

Strong chemicals should not be used on the product. If you accidentally get strong chemicals on the product, rinse off immediately, use plenty of water so that no chemicals remain in any joint.

Some chemicals have a small amount of solvent in them, this can dissolve sealing adhesives and compromise the product's waterproofness.

Some chemicals pull out liquid from plastic and rubber-based components, which makes the plastic or rubber brittle and bursts more easily.

Be careful not to use high water pressure close up on the product.

If you use high water pressure at short distances, most products find it difficult to close out the water.

INSTALLATION

If there is a contact/connector on the product, it should not be cutted. If the connector is cut, the warranty is not valid.

If the product has loose cable and no connector. If the cable is shorter than 50 cm, the cable must not be cutted. If the cable is cut, the warranty is not valid.

If the cable is longer than 50 cm, it is ok to shorten the cable, but not shorter than 50 cm.

If the cable is cut shorter than 50 cm, the warranty is not valid.

Tighten screws and bolts so that they do not loosen or chafe.

Ensure that nylon washers are used both before and after mounting the screws. Do not tighten screws so hard that the protective bearings on the product breaks.

WARNING!

Do not use higher volts than the product description states.

This light becomes hot under continuous use. Don't remove or touch the casing for at least 30 minutes after turning the lamp off.

Part no. 800655-58

Contact us if you need support: support@strands.se or +46(0)320-450450



www.strands.se
www.strandseurope.com